


1 Adresses

The Märklin Delta decoder has a "keyboard" with 4 contacts. The decoder can therefore be set to one of 16 addresses.

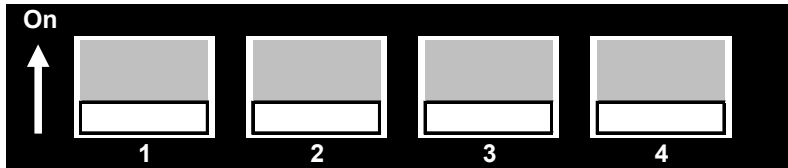

In Delta-operation you can only use 4 of the addresses, the other addresses can be used for digital operation.

To set the decoder for an address, you set the following contacts "On":

Digital Adress	Contacts ON	Note
02	- 2 3 4	
06	1 - 3 4	
08	- - 3 4	
18	1 2 - 4	
20	- 2 - 4	
24	1 - - 4	Locomotive no. 4 on the Delta control
26	- - - 4	
54	1 2 3 -	
56	- 2 3 -	
60	1 - 3 -	Locomotive no. 3 on the Delta control
62	- - 3 -	
72	1 2 - -	Locomotive no. 2 on the Delta control
74	- 2 - -	
78	1 - - -	Locomotive no. 1 on the Delta control
80	1 2 3 4	
	- - - -	Analog / Conventional operation